




BRS RESILIENT SEATED BUTTERFLY VALVE TECHNICAL SPECIFICATIONS



Materials of Construction

2–20" Valves (50–300mm)

Wafer and Lugged Designs

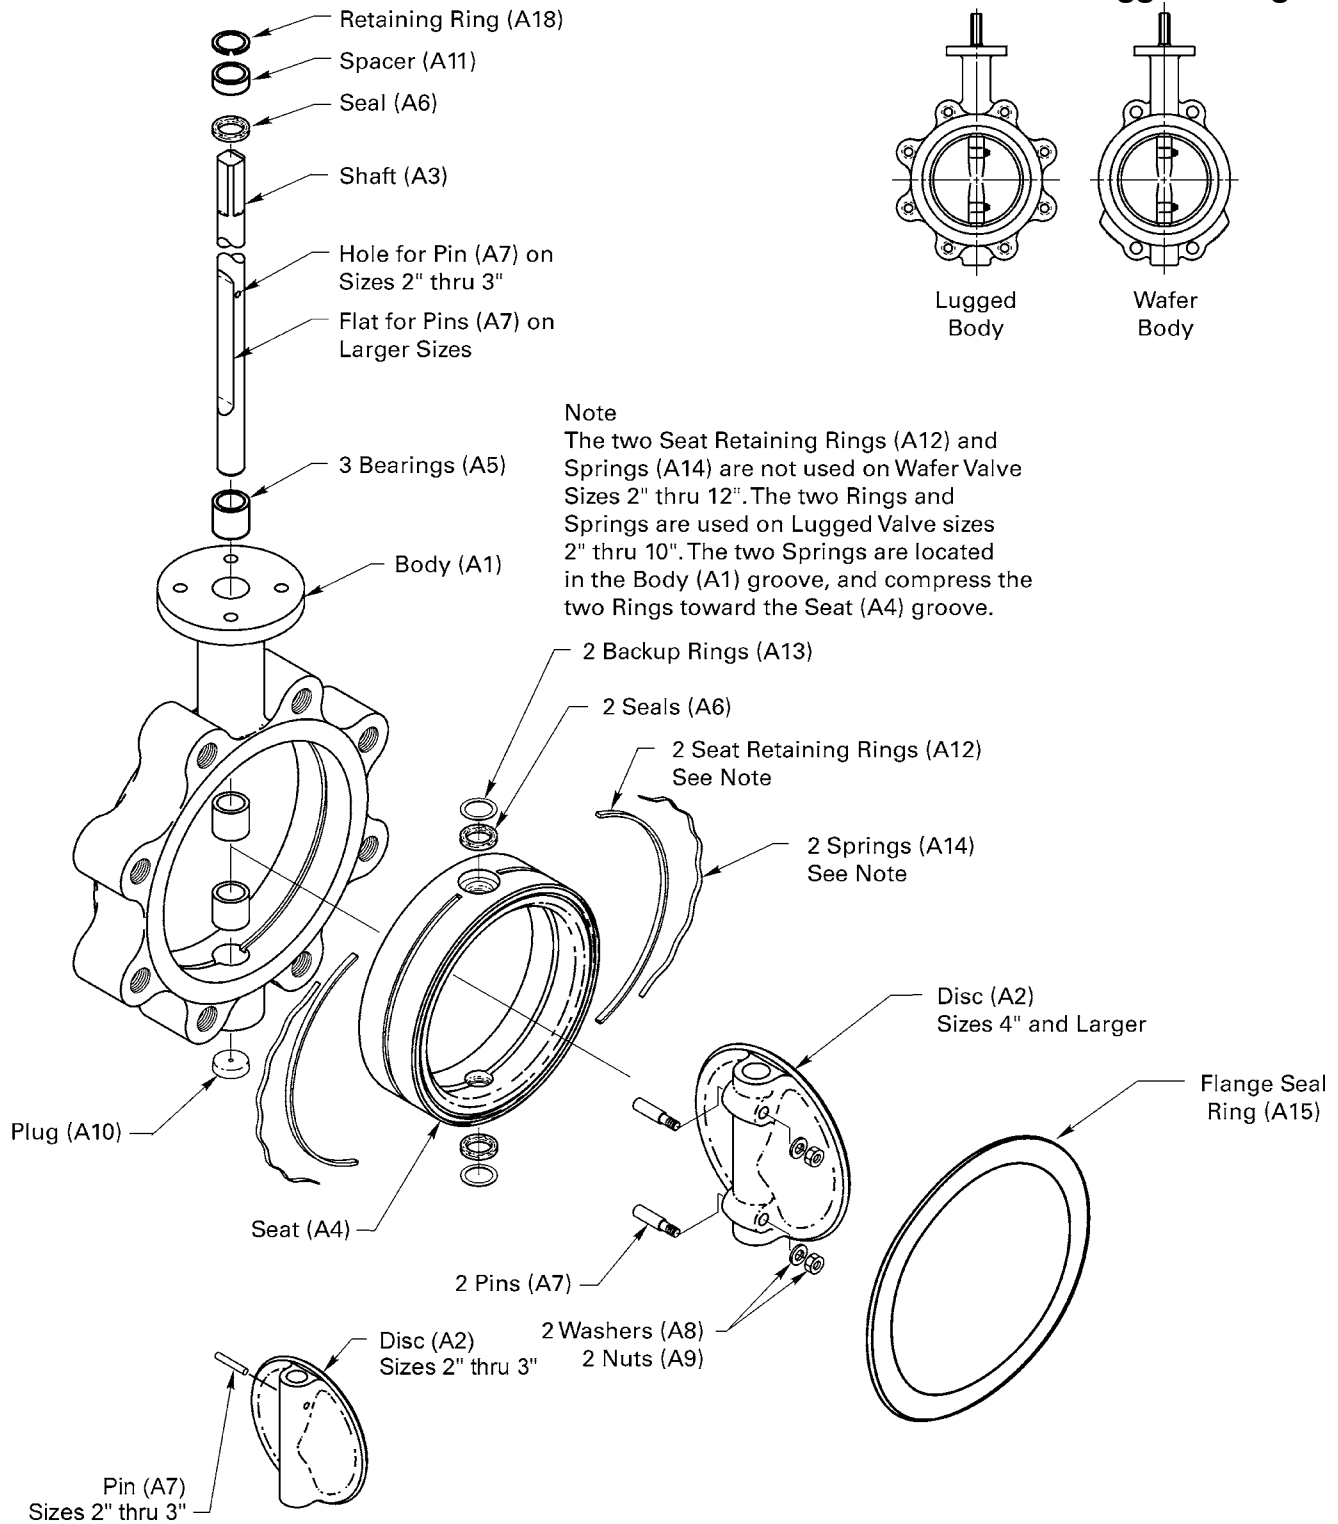


2–20" Valves (50–500mm)

Item	Description	Materials
A1	Body	Cast Iron, ASTM A126 Class B
		Ductile Iron, ASTM A536 Grade 65-45-12 (meets AWWA C504)
A2	Disc	Bronze, ASTM B584/B763, Grade C84400
		Ductile Iron electroless nickel plated, ASTM A536 Grade 65-45-12
		Ductile Iron with nickel edge, ASTM A536 Grade 65-45-12 (5–20") (meets AWWA C504)
		316 stainless steel, ASTM 473, Grade CF-8M
A3	Shaft	316 stainless steel, ASTM A276
		416 stainless steel, ASTM A582
A4	Seat	XNBR - Carboxylic-Acrylonitrile-Butadiene
		NBR - Acrylonitrile-Butadiene
		CR - Chloroprene
		EPDM - Ethylene Propylene a Diene Terpolymer
		EU - Polyether Urethane
A5	Bearing	PTFE coated stainless steel
A6	Seal	NBR - Acrylonitrile-Butadiene
		EPDM - Ethylene Propylene a Diene Terpolymer
A7	Pin	316 stainless steel, ASTM A276
A8	Washer, 4–20" Valves	316 stainless steel
A9	Nut, 4–20" Valves	316 stainless steel
A10	Plug	Cold rolled steel, zinc plated
A11	Spacer	316 L stainless steel
A12	Seat Retained Ring 14–20" Wafer Valves 2–20" Lugged Valves	Cold rolled steel
A13	Backup Ring	Teflon
A14	Spring 14–20" Wafer Valves 2–20" Lugged Valves	302 stainless steel
A15	Flange Seal	Carbon steel with adhesive gasket
A16	Thrust Plate (not shown) 16-20 Valves	Steel ASTM A36
A17	Gasket (not shown)	Non-asbestos
A18	Retaining Ring	302 stainless steel

Materials of Construction

24–36" Valves (600–900mm)

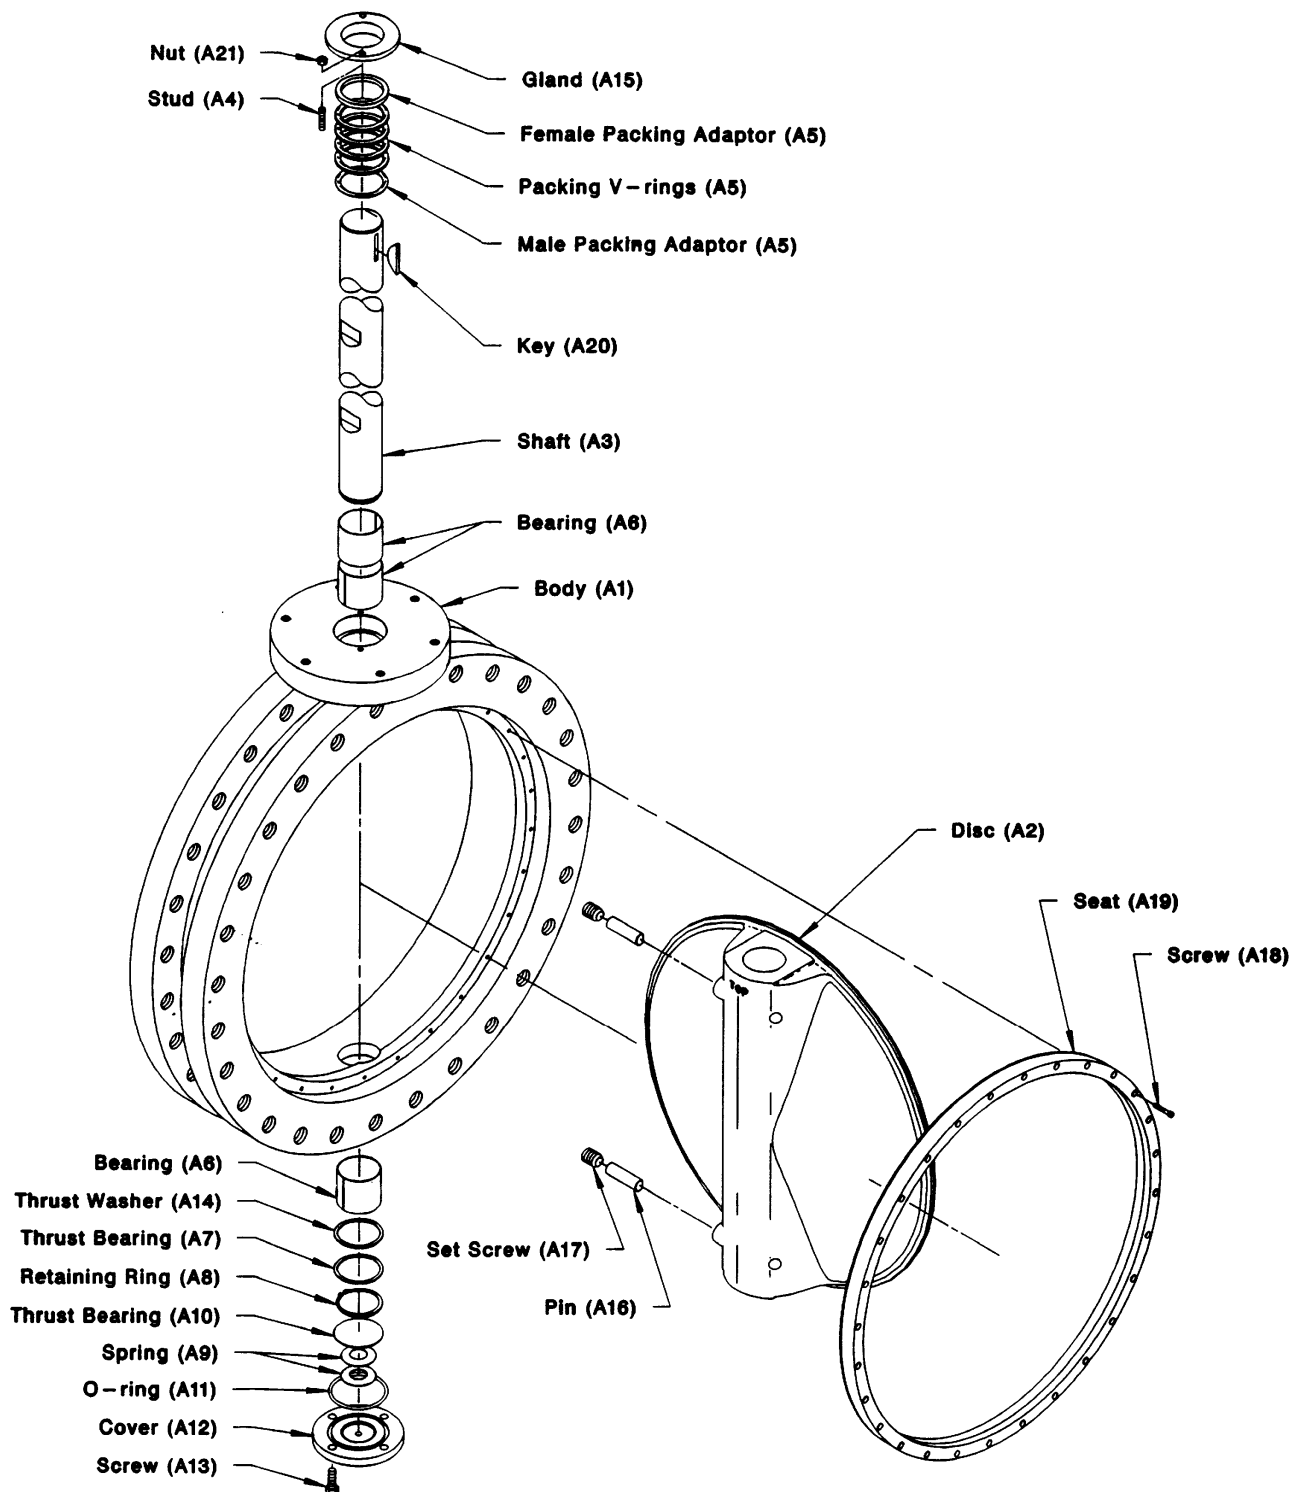

24–36" Valves (600–900mm)

Item	Description	Material
A1	Body	Cast Iron, ASTM A126 Class B
		Ductile Iron, ASTM A536, Grade 65-45-16 (meets AWWA C504)
A2	Disc	316 stainless steel, ASTM 743, Grade CF-8M
		Bronze, ASTM B584/B763, Grade C84400
		Ductile Iron with nickel edge, ASTM A536, Grade 65-45-12 (meets AWWA C504)
A3	Shaft	316 stainless steel, ASTM A276
		416 stainless steel, ASTM A582
A4	Stud	18-8 stainless steel
A5	Packing	NBR - Acrylonitrile-Butadiene PTFE
A6	Bearing	Fiber reinforced PTFE
A7	Thrust Bearing	Teflon with 304 stainless steel backing
A8	Retaining Ring	302 stainless steel
A9	Spring	302 stainless steel
A10	Thrust Bearing	Teflon with 304 stainless steel backing
A11	O-Ring	NBR - Acrylonitrile-Butadiene
		CMS - Chloro-Sulfonyl-Polyethylene
		FKM - Fluoro Rubber
A12	Cover	Steel, ASTM A36
A13	Screw	Steel, zinc plated
A14	Thrust Bearing	18-8 stainless steel
A15	Gland	Cast Iron, ASTM A236 Class B
A16	Pin	304 stainless steel, ASTM A276
A17	Set Screw	304 stainless steel, ASTM A276
A18	Screw	18-8 stainless steel
A19	Seat Ring	NBR - Acrylonitrile-Butadiene
		CR - Chloroprene
		EPDM - Ethylene Propylene a Diene Terpolymer
		FKM - Fluor Rubber
		EU - Polyether Urethane
	Base Metal	Bronze, ASTM B584/B763
A20	Key	Alloy steel
A21	Locknut	18-8 stainless steel

Valve Sizing and Ratings

Cv Values (Flow in GPM of water at 1 psi pressure drop)

Kv Valves (Flow in m³/hr. of water at 100 kPa pressure drop)

Valve Size	% Open									
	100	90	80	70	60	50	40	30	20	10
2" 50mm	<u>100</u> 87	<u>85</u> 74	<u>67</u> 58	<u>51</u> 44	<u>37</u> 32	<u>25</u> 22	<u>16</u> 14	<u>10</u> 9	<u>5</u> 4	<u>1.8</u> 1.6
2.5" 65mm	<u>170</u> 147	<u>145</u> 125	<u>114</u> 99	<u>87</u> 75	<u>63</u> 54	<u>43</u> 37	<u>27</u> 23	<u>16</u> 14	<u>8</u> 7	<u>3.1</u> 2.6
3" 80mm	<u>290</u> 251	<u>247</u> 214	<u>194</u> 168	<u>148</u> 128	<u>107</u> 93	<u>73</u> 63	<u>46</u> 40	<u>28</u> 24	<u>22</u> 19	<u>9</u> 7.8
4" 100mm	<u>530</u> 458	<u>451</u> 390	<u>355</u> 307	<u>270</u> 234	<u>196</u> 170	<u>133</u> 115	<u>85</u> 74	<u>50</u> 43	<u>24</u> 21	<u>9.5</u> 8.2
5" 125mm	<u>860</u> 744	<u>731</u> 632	<u>576</u> 498	<u>439</u> 380	<u>318</u> 275	<u>215</u> 186	<u>138</u> 119	<u>82</u> 71	<u>39</u> 34	<u>15</u> 13
6" 150mm	<u>1270</u> 1100	<u>1080</u> 934	<u>851</u> 736	<u>648</u> 561	<u>470</u> 407	<u>318</u> 275	<u>203</u> 176	<u>121</u> 105	<u>57</u> 49	<u>23</u> 20
8" 200mm	<u>2550</u> 2200	<u>2170</u> 1880	<u>1710</u> 1480	<u>1300</u> 1130	<u>944</u> 817	<u>638</u> 552	<u>408</u> 353	<u>242</u> 209	<u>115</u> 99	<u>46</u> 40
10" 250mm	<u>4020</u> 3480	<u>3420</u> 2960	<u>2690</u> 2330	<u>2050</u> 1770	<u>1490</u> 1290	<u>1005</u> 869	<u>643</u> 556	<u>382</u> 330	<u>181</u> 157	<u>72</u> 62
12" 300mm	<u>6090</u> 5270	<u>5180</u> 4480	<u>4080</u> 3530	<u>3110</u> 2690	<u>2250</u> 1950	<u>1520</u> 1320	<u>974</u> 843	<u>579</u> 501	<u>274</u> 237	<u>110</u> 95
14" 350mm	<u>7070</u> 6120	<u>6010</u> 5200	<u>4740</u> 4100	<u>3610</u> 3120	<u>2620</u> 2270	<u>1770</u> 1530	<u>1130</u> 977	<u>672</u> 581	<u>318</u> 275	<u>127</u> 110
16" 400mm	<u>9550</u> 8260	<u>8120</u> 7020	<u>6400</u> 5540	<u>4870</u> 4210	<u>3530</u> 3050	<u>2390</u> 2067	<u>1530</u> 1320	<u>907</u> 785	<u>430</u> 372	<u>172</u> 149
18" 450mm	<u>12100</u> 10500	<u>10300</u> 8910	<u>8110</u> 7020	<u>6170</u> 5340	<u>4480</u> 3880	<u>3030</u> 1970	<u>1940</u> 1680	<u>1150</u> 995	<u>545</u> 471	<u>218</u> 189
20" 500mm	<u>15100</u> 13100	<u>12800</u> 11100	<u>10100</u> 8740	<u>7700</u> 6660	<u>5590</u> 4840	<u>3780</u> 3270	<u>2420</u> 2100	<u>1430</u> 1240	<u>680</u> 588	<u>272</u> 235
24" 600mm	<u>23100</u> 20000	<u>19600</u> 17000	<u>15500</u> 13400	<u>11300</u> 9780	<u>8550</u> 7400	<u>5780</u> 5000	<u>3700</u> 3200	<u>2200</u> 1900	<u>1040</u> 900	<u>416</u> 360
30" 750mm	<u>37200</u> 32200	<u>31600</u> 27300	<u>24900</u> 21500	<u>19000</u> 16400	<u>13800</u> 11900	<u>9300</u> 8045	<u>5950</u> 5150	<u>3530</u> 3050	<u>1670</u> 1440	<u>670</u> 580
36" 900mm	<u>53300</u> 46100	<u>45300</u> 39200	<u>35700</u> 30900	<u>27200</u> 23500	<u>19700</u> 17000	<u>13300</u> 11500	<u>8530</u> 7380	<u>5060</u> 4380	<u>2400</u> 2076	<u>960</u> 830

Pressure Ratings

175 psi CWP (1600kPa CWP). 2–20": Zero-leakage shutoff to 175 psi CWP pressure differential with higher pressure on flat side of disc; zero-leakage tight shutoff to 100 psi pressure differential with higher pressure on curved side of the disc.
24–36": Zero-leakage shutoff to 175 psi CWP pressure differential with higher pressure on either side of the disc.

Pipeline Velocity Range

DeZURIK BRS resilient seated butterfly valves can be used at pipeline velocities up to 20 feet per second (6 meters per second). For applications greater than 20 feet per second, contact DeZURIK.

Valve Weights

Valve Size	Wafer		Lugged	
	Lbs.	Kg.	Lbs.	Kg.
2" (50mm)	8	4	10	5
2.5" (65mm)	10	5	12	6
3" (80mm)	11	5	14	6
4" (100mm)	18	8	21	10
5" (125mm)	22	10	26	12
6" (150mm)	28	13	33	15
8" (200mm)	42	19	52	24
10" (250mm)	59	27	72	33
12" (300mm)	99	45	125	57
14" (350mm)	120	54	155	70
16" (400mm)	180	82	255	116
18" (450mm)	250	113	330	150
20" (500mm)	331	150	446	202
24"*(600mm)	640	290	795	361
30"*(750mm)	990	449	1335	606
36"*(900mm)	1585	719	2125	964


*Add to valve weights above if valve has bronze disc.

24" (600mm) - 35lbs (15.9 kg), 30" (750mm) - 75lbs(34.0 kg),

36" (900mm) - 135 lbs (61.2 kg)

Flow Characteristic

Inherent Flow Characteristics

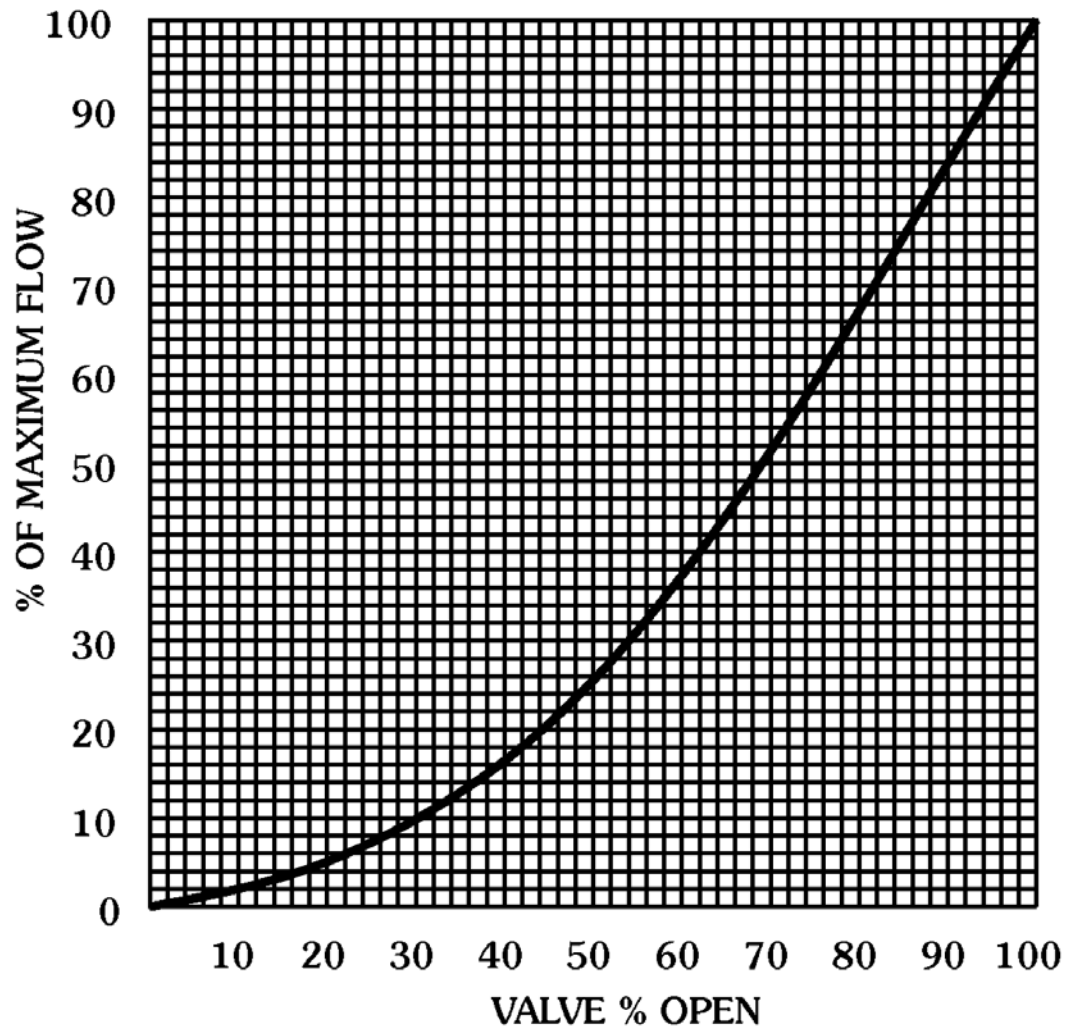

Applicable Standards

ANSI B16.1	Conforms to ANSI Class 125 flange drilling, material, testing and exceeds the wall thickness.
ANSI B16.5	Conforms to ANSI Class 150 flange drilling.
ANSI B16.104	Exceeds Class VI shutoff requirements.
AWWA Class 75B	Diameter of stainless steel shaft meets AWWA Class 75B standard.
AWWA Class 150B	Body wall thickness exceeds the AWWA Class 150B standard for butterfly valves.
AWWA C504	The welded nickel edge on the 4–36" cast iron disc conforms to AWWA C504.
MSS SP-25	Markings and identification conform to the requirements.
International Flange Drilling	Metric 10 bar flange drilling (W110 and L110) conforms to NP10 requirements of International Standard ISO 2084, to the 10 bar requirements of British Standard 4504 and to the NP10 requirements of German Standard DIN 2532. Ten bar flange drilling (W1J1 and L1J1) conforms to Japanese Industrial Standard JIS B2210.

Ordering

To order, simply complete the valve order code from the information shown. An ordering example is shown for your reference.

BRS	6,	W1,	CI,	NBR,	NBR,	CI-	S4	*
Valve Style	Valve Size	End Style	Body Material	Seat Material	Shaft Seal	Disc Material	Shaft Material	Actuator Code
							Trim Combination	

Valve Style

Give size code as follows:

BRS = Butterfly Rubber Seated - Includes flange seals thru 20"

Valve Size

Give size code as follows:

2 = 2" (50mm)	12 = 12" (300mm)
2.5 = 2.5" (65mm)	14 = 14" (350mm)
3 = 3" (80mm)	16 = 16" (400mm)
4 = 4" (100mm)	18 = 18" (450mm)
5 = 5" (125mm)	20 = 20" (500mm)
6 = 6" (150mm)	24 = 24" (600mm)
8 = 8" (200mm)	30 = 30" (750mm)
10 = 10" (250mm)	36 = 36" (900mm)

End Connection

Give end connection code as follows:

Lugged

L1 = ANSI Class 125
L110 = Lugged DIN 10 or BS 4504/10
L116 = Lugged DIN 16 or BS 4504/16
L1D = Lugged B.S.D.
L1E = Lugged B.S.E.
L1J1 = Lugged JIS 10

Wafer

W1 = ANSI Class 125
W110 = Wafer DIN 10 or BS 4504/10
W116 = Wafer DIN 16 or BS 4504/16
W1D = Wafer B.S.D.
W1E = Wafer B.S.E.
W1J1 = Wafer JIS 10

Other end connections available upon request.

Body Material

Give body material code as follows:

CI = Cast Iron
DI = Ductile Iron

Seat Material

Give seat material code as follows:

2-20" Valves

XNBR = Carboxylic-Acrylonitrile Butadiene 0 to 180°F (-18 to 83°C)
NBR = Acrylonitrile Butadiene to 180°F (83°C)
CR = Chloroprene, to 180°F (83°C)
EPDM = Terpolymer of Ehtylene Propylene & a Diene - 20 to 250°F (-28 to 122°C)
EU = Polyether Urethane, to 130°F (54°C)

24-36" Valves

CR = Chloroprene, to 180°F (83°C)
NBR = Acrylonitrile Butadiene to 180°F (83°C)
EPDM = Terpolymer of Ehtylene Propylene & a Diene - 20 to 250°F (-28 to 122°C)
EU = Polyether Urethane, to 130°F (54°C)
FKM = Fluoro Rubber, to 300°F (149°C)

Shaft Seal

Give shaft code as follows:

2-20" Valve Sizes-Standard:

NBR = Acrylonitrile Butadiene to 180°F (83°C) For use with all seats except CSM & EPDM
EPDM = Terpolymer of Ehtylene Propylene & a Diene - 20 to 250°F (-28 to 122°C) For use with EPDM Seat only

24-36" Valve Sizes:

NBR = Acrylonitrile Butadiene to 180°F (83°C) For use with all seats except KFM and EPDM
T = PTFE, to 500°F (260°C)

Trim Combination

Disc Material

Give disc material code as follows:

Standard 2-36":

BZ = Bronze (must use S4 shaft)
DI = Ductile Iron (must use S4 shaft) 2-4" are electroless nickel plated 5-36" have welded nickel edge
S2 = 316 stainless steel (must use S2 shaft)

Undercut Discs 2-20":

For 25 psig uni-directional shutoff. Contact DeZURIK for up to 100 psi shutoff. Larger sizes on application.

BZU = Undercut Bronze (must use S4 shaft)
DIU = Undercut Ductile Iron (must use S4 shaft) 2-4" are electroless nickel plated 5-36" have welded nickel edge
S2U = Undercut 316 stainless (must use S2 shaft)

Shaft Material:

Give shaft material code as follows:

S2 = 316 stainless steel. Use with 316 stainless steel discs.
S4 = 416 stainless steel. Use with bronze, cast iron and ductile iron discs.

Note: The limiting factor in valve selection is the temperature limit of the shaft seal or seat.

Options

Flange Seals

Standard:

= leave field blank for carbon steel flange seals(set of 2)

Special:

FS = 316 stainless steel flange seals (set of 2)

Actuators

Lever Actuators

Ten Position Levers

A 10-position dial provides positive latching in open, closed and eight intermediate positions. A pointer indicates position of disc plus a notch in the handle allows use of a padlock to prevent unauthorized valve operation. An optional adjustable memory stop is available to allow the valve to be closed and reopened to the same position.

Infinite-Position Levers

Throttling position is adjustable with infinite-position levers. Tightening the threaded shaft against the dial plate holds the disc in any desired position. A graduated dial indicates the disc position. Available with optional adjustable memory stop.

Ordering

To order, add lever code to basic valve identification. Handwheel actuators are recommended for valves above 6" (150mm) and where water hammer may occur due to a sudden valve closure.

Ordering Example:

BRS,6,W1,DI,NBR,DI-S4*LT

Memory Stop

An adjustable memory stop is available which allows return of the valve to preset open position after shutoff. Order the memory stop as part of complete valve by adding "ST" after the actuator code.

Ordering Example:

BRS,6,W1,DI,NBR,DI-S4*LT,ST

Manual Gear Actuators


Manual gear actuators are available in cast iron construction. They feature sintered bronze bearings on each end of the input shaft for durability and performance.

Lever Actuator Sizing

Lever Style	Size Range	Order Code
10 Position Lever	2-6" (50-150mm)	LT
	8-12" (200-300mm)	LT
Infinite Position Lever	2-6" (50-150mm)	LI

Mounting

Lever actuators can be mounted on standard, 90°, 180°, and 270° clockwise from standard. Specify mounting positions other than standard below the valve and actuator identification.

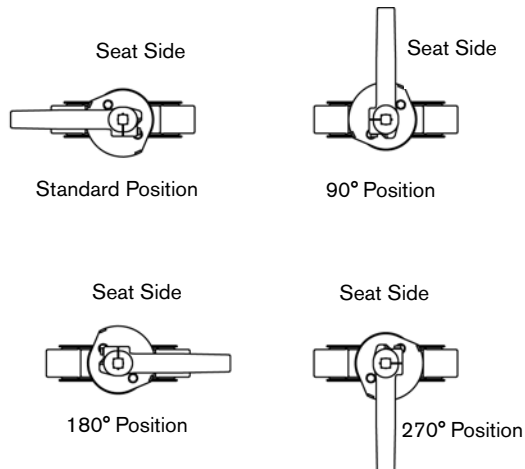

PowerRac® Cylinder Actuators

PowerRac® double-acting and spring-return actuators feature a proven rack-and-pinion design. PowerRac® provides high torque output throughout the full stroke for accurate control.




Spring Diaphragm Actuators

DeZURIK spring-diaphragm actuators feature all steel, cast iron and stainless steel construction with no aluminum parts to corrode in caustic environments. The output shaft is supported at the top and bottom with bronze bearings that absorb side thrust and ensure smooth, efficient throttling control. Diaphragm actuators provide on-off or modulating control with either spring-to-open or spring-to-close operation. All diaphragm actuators feature external position indication and are available with safety lockout devices.



Compak Cylinder Actuators


Compak actuators are a versatile rack-and-pinion design and are available as double-acting or spring-return units. The compact, modular design allows the actuator to be mounted for a low profile assembly. Compak actuators are matched to each valve's torque requirements to ensure that the most economical valve and actuator package is specified.

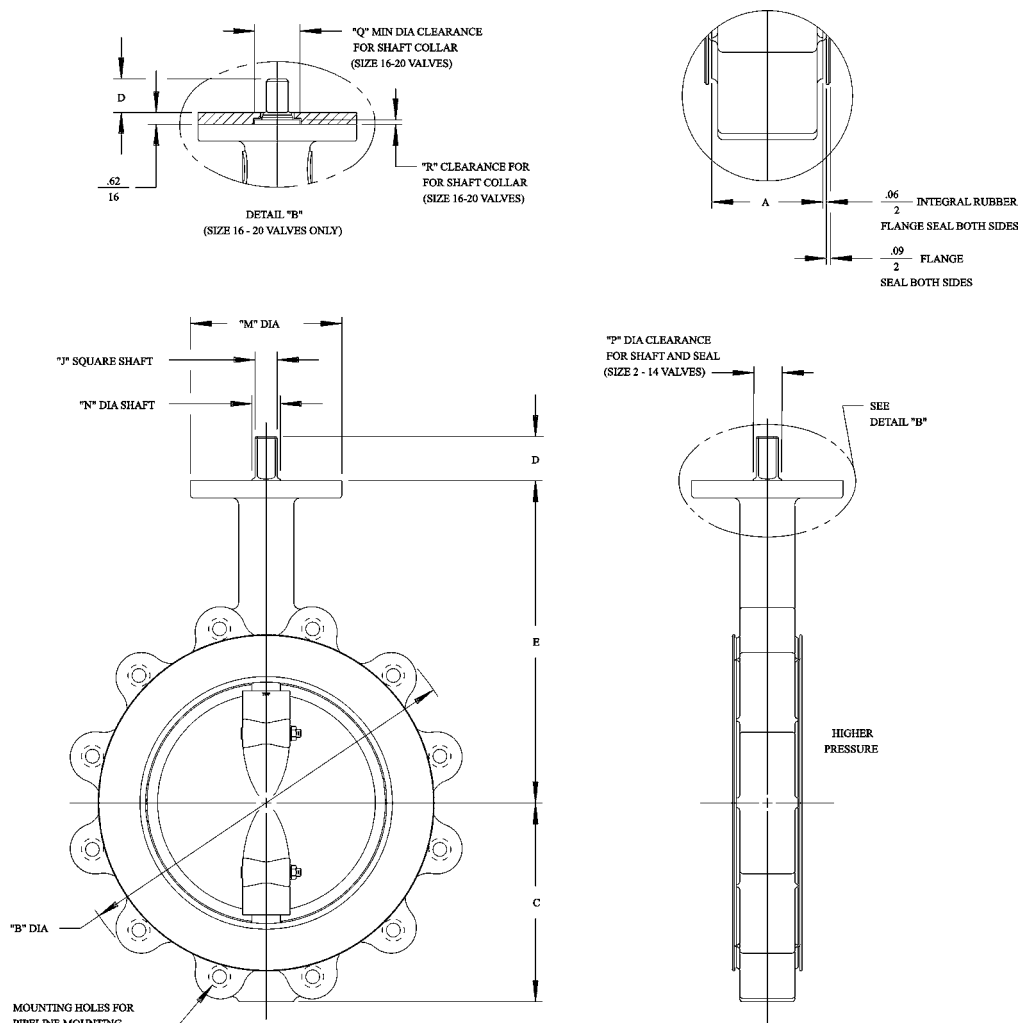

Basic Valve 2–20" (50–500mm)

Dimensions																
Valve Size	A	B		C	D	E	J-Square		M	N Diameter		P		Q	R	
		Lugged	Wafer				Inches	mm		Inches	mm	Inches	mm		Inches	mm
2" 50mm	1.56 40	6.00 152	4.06 103	2.94 75	1.75 44	5.50 140	.405 .403	10.29 10.24	4.00 102	.499 .497	12.67 12.62	.500 .530	12.70 13.46	–	–	–
2.5" 65mm	1.75 44	6.75 171	4.81 122	3.19 81	1.75 44	6.12 155	.405 .403	10.29 10.24	4.00 102	.499 .497	12.67 12.62	.500 .530	12.70 13.46	–	–	–
3" 80mm	1.75 44	7.25 184	5.31 135	3.50 89	1.75 44	6.50 1650	.405 .403	12.67 12.62	4.00 102	.499 .497	12.67 12.62	.500 .530	12.70 13.46	–	–	–
4" 100mm	2.00 51	8.75 222	6.81 173	4.12 105	1.75 44	7.12 181	.499 .497	15.84 15.80	4.00 102	.622 .620	15.80 19.00	.625 .655	15.88 16.64	–	–	–
5" 125mm	2.06 52	10.00 254	7.68 195	4.75 121	1.75 44	7.12 181	.624 .622	15.84 15.80	4.00 102	.748 0746	19.00 18.95	.750 .780	19.05 19.81	–	–	–
6" 150mm	2.06 52	11.00 279	8.68 220	5.50 140	1.75 44	8.62 219	.624 .622	17.42 17.37	4.00 102	.748 .746	19.00 18.95	.750 .780	19.05 19.81	–	–	–
8" 200mm	2.50 64	13.38 340	10.94 278	6.69 170	1.75 44	11.62 295	.686 .684	22.20 22.15	6.00 152	.873 .871	22.17 22.12	.875 .905	22.22 22.99	–	–	–
10" 250mm	2.50 64	16.00 406	13.31 338	7.88 200	1.75 44	12.75 324	.874 .872	23.77 23.72	6.00 152	1.123 1.121	28.52 28.47	1.125 1.155	28.58 29.34	–	–	–
12" 300mm	3.00 76	18.88 480	16.06 408	9.06 230	1.75 44	14.25 362	.936 .934	30.15 30.02	6.00 152	1.252 1.250	31.80 31.75	1.254 1.284	31.85 32.61	–	–	–
14" 350mm	3.00 76	20.88 530	17.68 449	10.00 254	1.75 44	14.50 368	1.187 1.182	30.15 30.02	8.31 211	1.496 1.494	38.00 37.94	1.498 1.528	38.05 38.81	–	–	–
16" 400mm	3.50 89	23.50 597	20.19 513	11.75 298	1.75 44	15.75 400	1.187 1.182	30.15 30.02	8.31 211	1.485 1.465	37.72 37.21	–	–	2.44 62	.250 .252	6.35 6.40
18" 450mm	4.25 108	25.12 638	21.56 548	12.81 325	1.75 44	16.62 422	1.499 1.493	38.07 37.92	8.31 211	1.850 1.840	47.24 46.74	–	–	2.81 71	.312 .314	7.92 7.98
20" 500mm	4.25 108	27.50 699	23.81 605	14.06 357	1.75 44	18.88 480	1.749 1.744	44.42 44.30	8.31 211	2.225 2.205	56.52 56.00	–	–	3.19 81	.312 .314	7.92 7.98


Dimensions

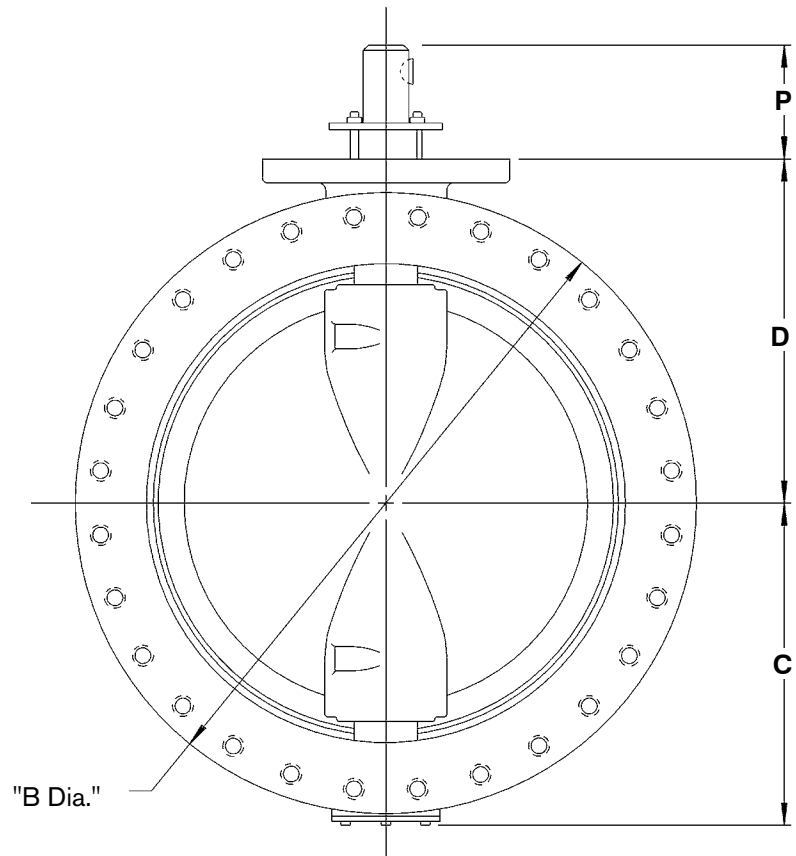

Basic Valve 24–36" (600–900mm)

Valve Size	A	B		C	D	E	P	S
		Lugged	Wafer					
24" 600mm	<u>6.25</u> 159	<u>32.00</u> 813	<u>26.50</u> 673	<u>17.62</u> 448	<u>20.00</u> 508	<u>2.50</u> 64	<u>6.62</u> 168	<u>1.50</u> 38
30" 750mm	<u>7.38</u> 187	<u>38.75</u> 984	<u>33.00</u> 838	<u>20.38</u> 518	<u>21.88</u> 556	<u>3.00</u> 76	<u>6.62</u> 168	<u>1.38</u> 35
36" 900mm	<u>9.00</u> 229	<u>46.00</u> 1168	<u>39.50</u> 1003	<u>24.12</u> 613	<u>26.25</u> 667	<u>3.62</u> 92	<u>6.62</u> 168	<u>1.38</u> 35


Inches
millimeter

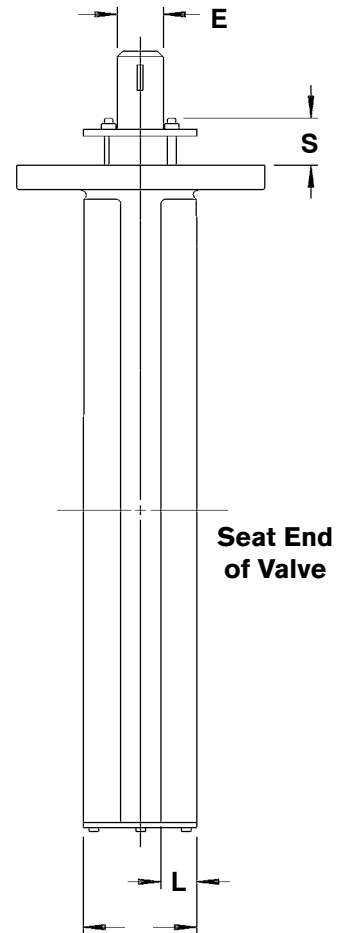

10 - Position Lever

Dimensions			
Valve Size	A	B	C
2-6" 50-150mm	$\frac{10.25}{260}$	$\frac{2.44}{62}$	$\frac{1.62}{41}$
8-12" 200-300mm	$\frac{22.00}{550}$	$\frac{3.38}{86}$	$\frac{1.81}{46}$

Inches
millimeter

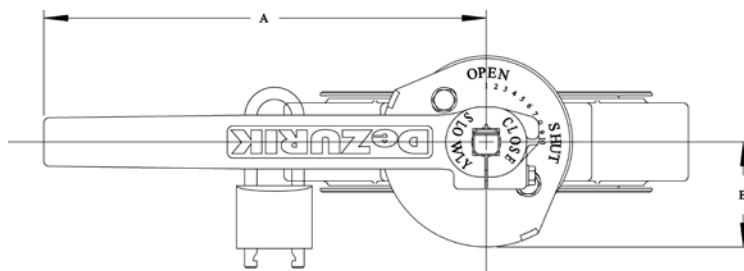


Infinite - Position Lever

Dimensions			
Valve Size	A	B	C
2-6" 50-150mm	$\frac{10.25}{260}$	$\frac{2.44}{62}$	$\frac{1.62}{41}$

Note: All dimensions are subject to change without notice. Request certified drawings for use in preparing piping layouts.

Actuator Dimensions

Refer to the appropriate actuator bulletin for dimensional information.

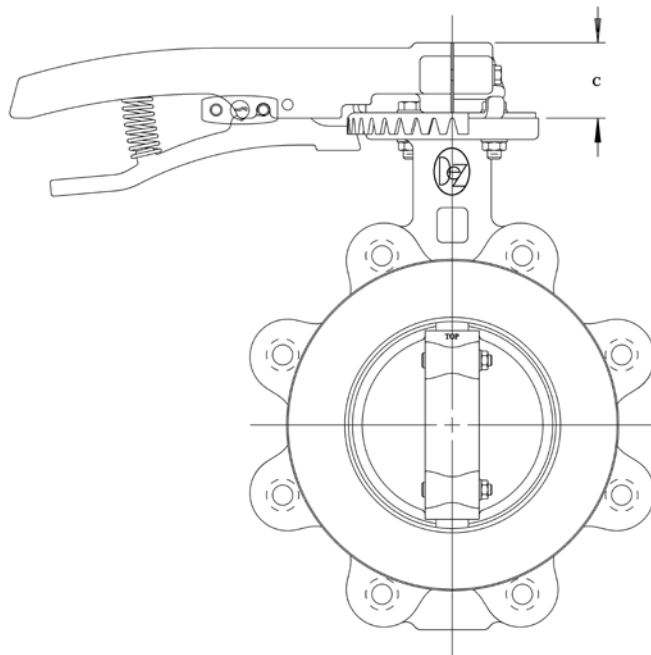

Sales and Service

For information about our worldwide locations, approvals, certifications and local representative:

Web Site: www.dezurik.com E-Mail: info@dezurik.com



250 Riverside Ave. N. Sartell, Minnesota 56377 • Phone: 320-259-2000 • Fax: 320-259-2227

DeZURIK reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing by DeZURIK. Certified drawings are available upon request.